


PN-LA862

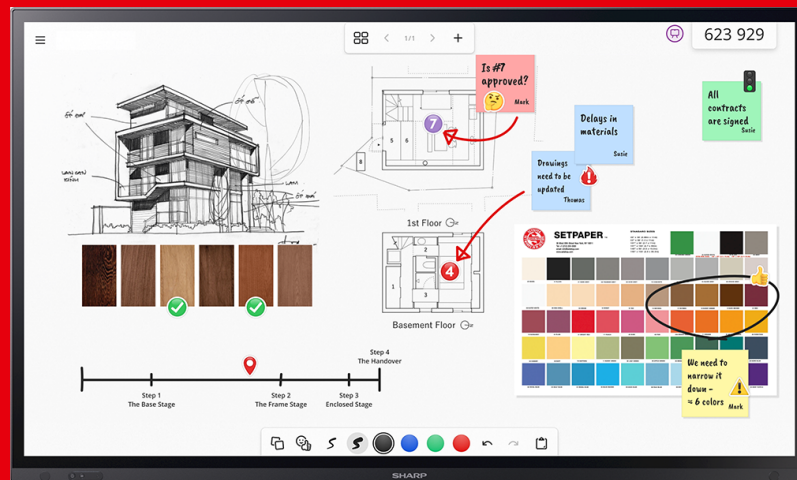

- Most natural writing experience – InGlass™ M5 premium touch system supports patented pressure sensitivity using passive pens as well as Windows Ink and palm rejection.
- Optional Windows based Intel SDM slot-in PC – driving unlimited versatility with powerful integrated computing for quick and easy access to your apps offering a secure and locked environment.
- Energy efficiency – built-in functionality including an ambient light sensor, human presence detection and eco modes help to reduce power consumption.
- Secure by design – the non-Android platform with additional security features meets the highest IT security standards.
- Increase your productivity – benefit from a free one-year license for FlatFrog Board for Rooms. FlatFrog Board whiteboard software makes hybrid work easy and productive for everyone

Specificaties

DISPLAYMODULE GEGEVENS

Panel Technologie	IPS with Direct LED backlights
Eigen resolutie (aantal pixels)	3840 x 2160
Beelddiagonaal (inches / cm)	86 / 217.4
Aspect Ratio	16:9
Backlight Technologie	LED
Helderheid (cd/m2)	450
Contrast Ratio	1200:1
Reactietijd (grijs naar grijs gem) ms	8
Kijkhoek (H/V)0 CR >10	178 / 178
Colour Depth [bn]	1.073 (10bit)

AANRAAKINTERFACE SPECIFICATIE

Technologie	InGlass™ M5
Aantal Aanraakgevoelige Punten	20
Coating / Filter	Anti-glare coating
Hardheid Scherm (H)	≥ 8
Compatibiliteit met Besturingssystemen	Native Multi-Touch: Windows 7, Windows 8, Windows 10, Linux, Android; Default Mouse: Windows XP, Windows Vista, Mac OS X
Thickness [mm]	3
Haze Level [%]	4 ~ 8
Touch Method	Finger; Gloves; Stylus (≥ 2 mm)
Data Interface	USB-HID
Accuracy [mm]	< 1
Palm Rejection	Yes
Windows Ink	Yes

MATEN EN GEWICHTEN

Grootte Omlijsting (L/R) mm	4.8
Grootte Omlijsting (U/L) mm	4.8 / 32.3
Product Afmetingen (B/H/D) mm	1,965.4 x 1,163.9 x 86.5
Gewicht zonder standaard (kg)	71.5

CONNECTIVITEIT (AUDIO/VIDEO) INPUT

HDMI	2
DisplayPort	1

CONNECTIVITEIT (BEHEER /SERIËLE GEGEVENS

RS232C IN	1
LAN-poort	1
USB	4

BELANGRIJKSTE SPECIFICATIES

Special Characteristics	DICOM Simulation; HDMI ARC; Powered USB Port (5 W)
24/7 Werking Gecertificeerd	•
Lokaal Dimmen	•
Ingebouwde luidsprekers (W)	10 W + 10 W

VOEDING EN BESTURINGSOMGEVING

Bedrijfsspanning (ACV) / Frequentie (Hz)	100-240; 50 / 60
Stroomverbruik (W) (MAX)	275 shipping
Werkende Temperatuur (oC)	+5 to +35
Vochtigheid (%)	20 to 80
Power Savings Mode [W]	< 0.5 (ECO Standby); < 2 (Networked Standby)

INSTALLATIE

Liggend	•
Staand	•
Horizontaal	•
Bevestiging (VESA/Aantal Punten/Pitch mm)	4; 600 x 400

CONNECTIVITEIT (AUDIO/VIDEO) OUTPUT

DisplayPort	1
Audio/Koptelefoon Aansluiting 3,5 mm	1

ACCESSOIRES

Shipping Contents	1x 300 cm USB Cable; 2 x Passive Stylus; 2x AAA batteries; Blank Sticker; Bracket for Camera; Bracket for Mini PC; Cable Clamps; Display; Power Cable; Remote Control; Setup Manual
-------------------	---

