A3 kleuren kopieerapparaten


# Sharp BP-51C26




## De Sharp BP-51C26 is een slimme A3-kleuren-MFP met meerlaagse beveiligingsfuncties en geavanceerde milieureferenties, perfect voor elk modern kantoor.

- 26 ppm A3-kleuren-MFP met naadloze integratie en verbinding met cloudgebaseerde bedrijfsprocessen
- Meerlaagse beveiligingsfuncties zijn onder meer automatisch BIOS-herstel als er afwijkingen worden gedetecteerd tijdens het opstarten en de standaard Trusted Platform Module om uw vertrouwelijke gegev
- Breng meer flexibiliteit in uw printuitvoer met een uitgebreid scala aan afwerkingsopties, waaronder nieten, perforeren en vouwen
- Een duurzaam ontwerp maakt gebruik van tot 50% gerecycled plastic bij de productie, de basiseenheid van de MFP en kartonnen verpakkingen helpen plastic afval te verminderen
- Omgekeerde enkelvoudige invoerinvoer voor 100 vel scant enkelzijdige originelen met snelheden tot 80 ipm voor het gemakkelijk en efficiënt uitvoeren van grote opdrachten
- Geavanceerde eco-technologieën zorgen voor een indrukwekkend lage TEC-waarde en een stand-by stroomverbruik
- Met ondersteuning voor Microsoft Entra ID kunt u identiteiten beheren en de toegang tot apparaten beheren via een veilige cloudgebaseerde tool
- Intuïtieve pictogrammen en een smartphone-achtige interface op het 10,1-inch LCD-kleurenbedieningspaneel maken de bediening van de MFP soepel en eenvoudig
- Met eenmalige aanmelding kunt u snel en eenvoudig veilig afdrukken van of scannen naar openbare cloudopslagservices
- Blijf up-to-date en compliant met automatische online firmware- en applicatie-updates via de Sharp Application Portal

# Configuraties

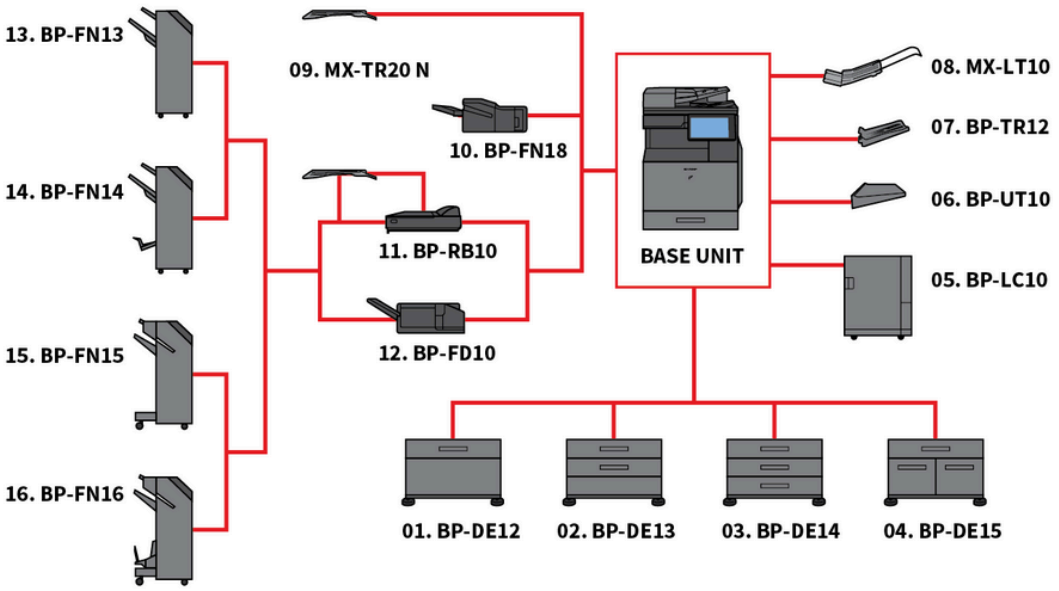


# Afmetingen

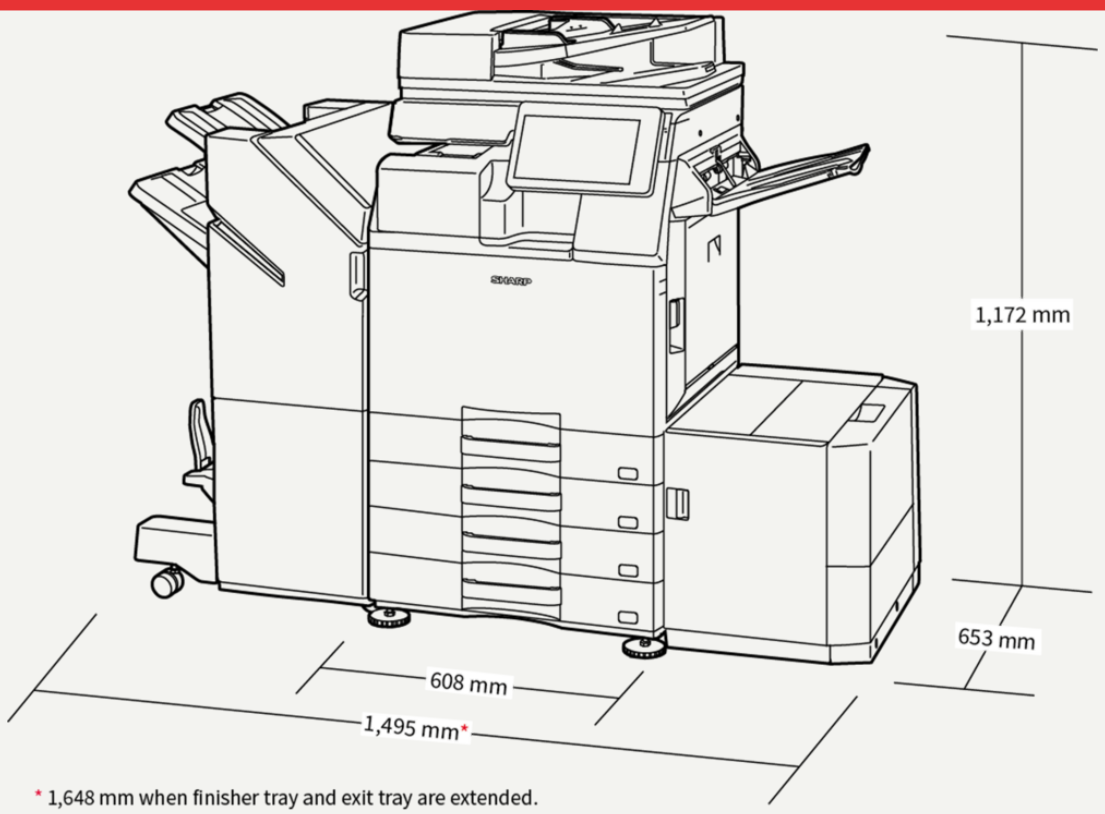


* 1,648 mm when finisher tray and exit tray are extended.

# Opties

## Basismodel

**BP-LC10 Large Capacity Tray**
3,000 sheets (based on 80 g/m2), A4-B5 (60-220 g/m2)

**BP-DE14 Stand with 3 x 550-sheet Paper Drawers**
550 sheets each for lower and upper trays (based on 80 g/m2), SRA3-A5R (60-300 g/m2)

**BP-UT10 Utility Table**

**BP-DE13 Stand with 2 x 550-sheet Paper Drawers**
550 sheets each for lower and upper trays (based on 80 g/m2), SRA3-A5R (60-300 g/m2)

**BP-DE15 Stand with 550 + 2100-sheet Paper Drawers**
Upper tray: SRA3-A5R, 550 sheets* (60-300 g/m2); Lower tray (Left): A4, 1,200 sheets* (60-105 g/m2); Lower tray (Right): A4 - B5, 900 sheets* (60-105 g/m2); * Number of sheets based on 80 g/m2

**BP-DE12 Stand with 550-sheet Paper Drawer**
550 sheets (based on 80 g/m2), SRA3-A5R (60-300 g/m2)

## Scanning

**MX-EB20 OCR Expansion Kit**
Convert scanned documents into editable Microsoft® Office files and searchable PDFs via Optical Character Recognition (OCR).
Essential MFPs only

**MX-EB19 Enhanced Compression Kit**
Enables creation of high compression PDFs.

## Opslag

**BP-SD10 High Capacity SSD**
512GB SSD

## Beveiliging

**BP-FR12U Data Security Kit**
Commercial version

**BP-VD10 Virus Detection Kit**

## Printing

**MX-PF10 Barcode Font Kit**
Enables barcode printing

**MX-PU10 Direct Print Expansion Kit**
Direct print Microsoft® Office files from USB drives. Essential MFPs only.

## Sharp OSA

**MX-AMX1 Application Integration Module**

**BP-AM11 External Account Module**

**BP-AM10 Application Communication Module**

## Faxen

**MX-FWX1 Internet Fax Expansion Kit**

## Afwerking

**MX-LT10 Long Paper Feeding Tray**
Recommended for banner printing

**MX-PN15D Punch Module - 4 Hole Wide**
Punch module for BP-FN13/BP-FN14/MX-FN28/MX-FN29

**MX-PN14D Punch Module - 4 Hole Wide**
Punch module for BP-FN11/BP-FN12

**BP-FN14 1k Saddle Stitch Finisher**
A3W-A5R (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 1,000-sheet paper capacity (based on 80 g/m2); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m2); Saddle stitch tray (lower): 7 sets (11-15 sheets), 10 sets (6-10 sheets), 20 sets (1-5 sheets). 15 sheets max per set; Requires BP-RB10 Paper Pass Unit

**MX-PN16D Punch Module - 4 Hole Wide**
Punch module for BP-FN15/BP-FN16/MX-FN30/MX-FN31/MX-FN34/MX-FN35

**MX-PN15C Punch Module - 2/4 Hole**
Punch module for BP-FN13/BP-FN14/MX-FN28/MX-FN29

**MX-PN14C Punch Module - 2/4 Hole**
Punch module for BP-FN11/BP-FN12

**BP-FN13 1k Finisher**
A3W-A5R (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 1,000-sheet paper capacity (based on 80 g/m2); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m2); Requires BP-RB10 Paper Pass Unit

**BP-FD10 Folding Unit**
200 sheets (based on 80 g/m2), A3, B4, A4R (Z-fold, half fold), A3, A4R (C-Fold, Accordion fold), 60-256 g/m2

**MX-PN16C Punch Module - 2/4 Hole**
Punch module for BP-FN15/BP-FN16/MX-FN30/MX-FN31/MX-FN34/MX-FN35

**BP-TR12 Exit Tray Unit**

**BP-RB10 Paper Pass Unit**
Required when using BP-FN13, BP-FN14, BP-FN15 or BP-FN16

**BP-FN16 3k Saddle Stitch Finisher**
A3-B5 (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 3,000-sheet paper capacity (based on 80 g/m2); Stapling capacity: max. 65-sheet multi-position staple (based on 80 g/m2); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m2), 40 sheets (80 g/m2); Stapleless capacity: max. 10-sheet (64 g/m2), 8 sheet (65 - 81.4 g/m2), 6 sheet (81.5 - 105 g/m2); Saddle stitch tray (lower): 10 sets (11-20 sheets), 15 sets (6-10 sheets), 25 sets (1-5 sheets). 20 sheets max per set; Requires BP-RB10 Paper Pass Unit

**BP-FN15 3k Finisher**
A3-B5 (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 3,000-sheet paper capacity (based on 80 g/m2); Stapling capacity: max. 65-sheet multi-position staple (based on 80 g/m2); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m2), 40 sheets (80 g/m2); Stapleless capacity: max. 10-sheet (64 g/m2), 8 sheet (65 - 81.4 g/m2), 6 sheet (81.5 - 105 g/m2); Requires BP-RB10 Paper Pass Unit

**BP-FN18 Inner Finisher**
A3 - B5 (offset/staple), SRA3 - A5R (non offset); Offset tray (upper): max. 500-sheet paper capacity*; Stapling capacity: max. 50-sheet multi-position staple*; Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m2), 40 sheets (80 g/m2); Stapleless capacity: max.10-sheet (64 g/m2), 8 sheet (65 - 81.4 g/m2), 6 sheet (81.5 - 105 g/m2)

# Specificaties

## Algemeen

| | |
|---|---|
| Motorsnelheid: A4 Kleur (ppm) | 26 |
| Motorsnelheid: A4 Zwart-wit (ppm) | 26 |
| Motorsnelheid: SRA3 Zwart-wit (ppm) | 15 |
| Technologie | 15 |
| Papierformaat: Min. | A6R |
| Papierformaat: Max. | SRA3 |
| Papiergewicht: Min. (g/m²) | 52 |
| Papiergewicht: Max. (g/m²) | 300 |
| Papiercapaciteit: Standaard (vellen) | 650 |
| Papiercapaciteit: Max. (vellen) | 6300 |
| Opwarmtijd (sec.) | 16 |
| Algemeen geheugen: Max. (GB) | 5 |
| Opslag: Std. | SSD |
| Opslag: Opt. | SSD |
| SSD-capaciteit: Std. (GB) | 128 |
| SSD-capaciteit: Opt. (GB) | 512 |
| Dubbelzijdig | Std. |
| Stroomvoorziening: Frequentie min. (Hz) | 50 |
| Stroomvoorziening: Frequentie max. (Hz) | 60 |
| Stroomverbruik (kW) | 1,84 |
| Basiseenheid breedte (mm) | 608 |
| Basiseenheid diepte (mm) | 653 |
| Basiseenheid hoogte (mm) | 829 |
| Gewicht (kg) | 77 |
| Stroomvereisten: Netspanning min. (V) | 200 |
| Stroomvoorziening: Netspanning max. (V) | 240 |

## Scanner

| | |
|---|---|
| Scan methode | Std. |
| Push-scan resolutie (dpi) | 100, 150, 200, 300, 400, 600 |
| Pull-scan resolutie (dpi) | 75, 100, 150, 200, 300, 400, 600, 50-9600 |
| Bestandsindelingen: Standaard | TIFF, PDF, JPEG, PDF/A-1b, Encrypted PDF, XPS |
| Bestandsindelingen: Optioneel | Rich Text (RFT), Searchable PDF, PDF/A-1a, Compact PDF, Text (TXT), Office Open XML (pptx, xlsx, docx) |
| Scanbestemmingen | Desktop, FTP, Email, SMB (Netwerk map), USB-geheugen |

## Bestand

| | |
|---|---|
| Bestandsarchivering | Std. |
| Opgeslagen taken | Kopieer, Print, Scan, Faxopdrachten |
| Opslagmappen | Quick file, Main, Custom (Max 1000) |

## Afwerking

| | |
|---|---|
| Uitvoercapaciteit: Min. (vellen) | 500 |
| Uitvoercapaciteit: Max. (vellen) | 3250 |
| Nietcapaciteit: Max. (vellen) | 65 |
| Zadelsteek | Opt. |
| Offset shifting | Std. |
| Perforator | Opt. |

## Toneropbrengst

| | |
|---|---|
| Zwart (pagina's met 5% dekking) | 40000 |
| Cyaan (pagina's met 5% dekking) | 24000 |
| Magenta (pagina's met 5% dekking) | 24000 |
| Geel (pagina's met 5% dekking) | 24000 |

## Printer

| | |
|---|---|
| Netwerkprinter | Std. |
| Resolutie (dpi) | 1200 x 1200, 600 x 600, 9600 x 600 |
| Interface: Standaard | USB 2.0, USB 3.0, 10Base-T, 100Base-TX, 1000Base-T |
| Ondersteund besturingssysteem: Standaard | Windows 10, Windows 11, Windows Server 2016, Windows Server 2019, Windows Server 2022, Windows Server 2025, Mac OS X 10.15, Mac OS X 11, Mac OS X 12, Mac OS X 13, Mac OS X 14, macOS 15 |
| Netwerk protocollen | TCP/IP (IPv4, IPv6) |
| Afdrukprotocollen | LPR, Raw TCP (port 9100), POP3 (e-mail printing), HTTP, FPT for downloading print files, IPP, SMB, WSD |
| Beschikbare lettertypen | 80 PCL, 139 PostScript 3 |

## Kopieerapparaat

| | |
|---|---|
| Origineel papierformaat: Max. | A3 |
| Duur eerste kopie: Kleur (sec.) | 7,6 |
| Duur eerste kopie: Zwart-wit (sec.) | 6,5 |
| Elektronische sortering | Opt. |
| Continue kopie (Max. aantal kopieën) | 9999 |
| Scanresolutie: Zwart-wit (dpi) | 600 x 600, 600 x 400 |
| Scanresolutie: Kleur (dpi) | 600 x 600 |
| Afdrukresolutie (dpi) | 1200 x 1200, 600 x 600, 9600 x 600 |
| Gradatie: Kleur (gelijke niveaus) | 256 |
| Zoombereik: Min. (%) | 25 |
| Zoombereik: Max. (%) | 400 |
| Vooraf ingestelde kopieerverhoudingen | 10 |
| Netwerkscanner | Push scan, Pull scan |

## Fax

| | |
|---|---|
| Fax | Opt. |
| Compressiemethode | MH, MR, MMR, JBIG |
| Communicatieprotocol | Super G3, G3 |
| Transmissietijd (sec.) | 2 |
| Modemsnelheid: Min. (bps) | 2400 |
| Modemsnelheid: Max. (bps) | 33600 |
| Transmissieresolutie: Standaard (dpi) | 203.2 x 97.8 dpi |
| Transmissieresolutie: Ultra fine(dpi) | 406.4 x 391 dpi |
| Documentgrotte: Min. | A5 |
| Documentgrootte: Max. | A3 |
| Geheugen: Max. (GB) | 4 |
| Grijswaarden (niveaus) | 256 |
| Kiesregistratie: Snel/snel kiezen | 2000 |
| Uitzendtransmissie (max. bestemmingen) | 500 |

## Draadloos LAN

| | |
|---|---|
| Draadloos LAN | Opt. |
| Conform regelgeving | IEEE802.11a/ac/b/g/n |
| Toegangsmodus | Infrastructuur modus, Software AP modus |
| Beveiliging | WEP, WPA/WPA2-mixed PSK, WPA/WPA2-mixed EAP, WPA2 PSK, WPA2 EAP, WPA2 EAP/WPA3-mixed, PSK/SAE, WPA3 SAE, WPA2/WPA3-mixed, EAP, WPA3 EAP |

Design and specifications are subject to change without prior notice. All information was correct at time of print. Microsoft, Excel, PowerPoint, OneDrive, SharePoint, Active Directory, Windows Server, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the US and/or other countries. Adobe and PostScript 3 are either registered trademarks or trademarks of Adobe Systems Incorporated in the US and/or other countries. Google Drive, Gmail, Android, and Google Cloud Print are trademarks of Google LLC. The Google Drive trademark is used with permission from Google LLC. Box is a trademark, service mark, or registered trademark of Box, Inc. QR Code is a registered trademark of DENSO WAVE INCORPORATED in Japan and other countries. AirPrint and Mac are trademarks of Apple Inc., registered in the US and other countries. PCL is a registered trademark of Hewlett_x0002_Packard Company. Qualcomm DirectOffice is a product of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm is a trademark of Qualcomm Incorporated, registered in the US and other countries. DirectOffice is a trademark of CSR Imaging US, LP, registered in the US and other countries. All other company names, product names and logotypes are trademarks or registered trademarks of their respective owners. ©Sharp Corporation All trademarks acknowledged. E&O. Ref: Sharp BP-51C26, 23/11/2026